

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:  
Ming-Yee CHIU


Art Unit: Unassigned

Serial No.: Unassigned

Examiner: Unassigned

Filing Date: January 31, 2001

For: Method and Apparatus for  
Monitoring an Analog Meter


**REQUEST FOR PRIORITY UNDER 35 USC §119(a)**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Applicant herein and hereby requests the benefit of priority under 35  
U.S.C. §119(a) to the priority European patent application EP 00101947.0, filed  
February 1, 2000, for the above-identified US utility patent application.

Respectfully submitted,

  
Jacob Eisenberg  
Attorney for Applicant  
Registration No. 43, 410

Date: Feb. 1, 2001

Epping, Hermann & Fischer  
Ridlerstrasse 55  
D-80339, Munich, Germany  
+49 89 500-3290

**THIS PAGE BLANK (USPTO)**



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

00101947.0

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**I.L.C. HATTEN-HECKMAN**

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

16/01/01

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 00101947.0  
Demande n°:

Anmeldetag:  
Date of filing: 01/02/00 ✓  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Setrix AG  
80807 München  
GERMANY

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Method and apparatus for monitoring an analog meter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
G01D5/39, G06K9/20

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR ✓  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**



## Description

## Method and Apparatus for Monitoring an Analog Meter

## 5 FIELD OF THE INVENTION

The invention refers to a method for monitoring an analog meter by recording a digitized image of the meter whereby the meter comprises a set of graduation segments and at least one  
10 needle. The invention further refers to an apparatus for performing the above method.

## BACKGROUND OF THE INVENTION

15 Analog meters have been used in conjunction with sensors to provide visual display of the physical parameter that the sensor is designed to measure. Even though digital meters are now available, analog meters are still used widely, especially for situations where use of electricity is to be avoided  
20 for the reason of preventing electrical spark near the fuel storage tanks. These meters are usually installed in widely separated geographical regions so gathering the meter information requires wide-area communication network. Fortunately, the cost of sending compact digital data such as the meter  
25 reading or meter conditions is becoming very inexpensive nowadays. One example is the use of Short Message Service of the wireless GSM network. Therefore it is desirable to equip an analog meter installed in the field with a "non-contact" device that is capable of reading the meter digitally and  
30 sending the data or other conditions to a user or a computer system on the wired or wireless communication network. The reading device must be flexible to read different meters and must be able to perform a precise reading at reasonable time.

35 Previous image processing work by Robert Sablatnig et al.: "Automatic Reading of Analog Display Instruments", Proc. of the 12<sup>th</sup> International Conference on Pattern Recognition

(1994), pp 794-797 as well as "Machine Vision for Automatic Calibration of Analog Display Instruments", SPIE Proc. on Machine Vision applications in Industrial Inspection III, vol. 2423 (1995), pp 356-366 described methods to read the analog utility (gas, water or electricity) meters. Utility meters differ from the gauge-like meter. First, a utility meter has multiple dials. Each dial has a needle that reads one digit (0-9) of the entire reading. In contrast, the gauge-like meter has only one dial or scale with fine reading resolution ranging from 1 out of 50 or 1 out of 1000. Second, the needle of a utility dial rotates continuously in one direction only. The needle of the gauge-like meter can only rotate in less than 360 degree and in both directions. Sablatnig et al. use the Hough transform technique to detect and locate the outlining circles of all dials in the utility meter. There is no detection of the graduation marks of the dial. The basic operation of the Hough Transform is described in Ballard and Brown: "Generalizing the Hough transform to detect arbitrary shapes", Pattern Recognition Vol. 13(2) (1981), pp 111-122 and E.R. Davies: "Machine Vision: Theory, Algorithms, Practicalities", Academic Press (1996).

US patent 5,013,154 describes a "System for remotely reading an analog meter". The teaching of this patent uses a video camera and an information processing system with look-up table to read gauge-like analog meters. The patent assumes that a pre-defined path of interest on the image plane is known. The information processing system extracts the intensity profile along the pre-defined path from the image and detects the location of the needle pointer based on the reflectivity difference between the needle and the background. A relative distance along the defined path between the needle and the starting point of the defined path indicates the reading. One assumption that the patent makes is that there is no black character, graphics or scale mark along the path of interest that can interfere with the black needle. The patent also as-

sumes that the position and orientation of the meter is fixed with respect to the imaging system.

- US Patent 5,673,331 teaches methods for reading gauge-like analog meters from video images. It also assumes that the position and orientation of the meter is fixed. Using a pre-operation calibration procedure to determine data such as the position of the needle pivot point and the leftmost and rightmost points of travel of the needle, the system performs the reading by locating the angular position of the needle pointer and compares it with the calibrated data. It uses a 2D template matching technique to determine the angular position of the needle.
- US Patent 5,559,894 describes methods for inspection and reading of utility meters (not gauge-like meters). It first uses pre-defined templates to identify a particular meters and determine its relative position and orientation with respect to the fixture. From the position and orientation data, the angular positions of all the dial needles are determined. Again, one dial decides one digit of the meter reading.

It is an objective of the invention to provide a method for monitoring an analog meter which is flexible and allows easy installation for various existing analog meters.

It is another objective of the invention to provide an apparatus to perform that method so that flexible installation and remote monitoring of various analog meters is allowed.

30

#### SUMMARY OF THE INVENTION

With respect to the method the objective of the invention is solved by a method for monitoring an analog meter having a set of graduation segments and at least one needle, the method comprising the steps of: recording a digitized image of the meter, the meter; extracting a set of edge points rep-

representative of the graduation segments from said image; performing a Hough Transform on said set of edge points to obtain a center point of said set of graduation segments; and extracting an intensity profile of said image along a path  
5 through said graduation segments to obtain a set of detected graduation segments and to obtain a position of said needle relative to said set of detected graduation segments.

With respect to the apparatus the objective of the invention  
10 is solved by an apparatus for performing the above method for monitoring of an analog meter comprising: a sensor for obtaining a digitized image; a processor for extracting a set of edge points representative of graduation segments of said meter from said image, for performing a Hough Transform on  
15 said set of edge points to obtain a center point, for extracting an intensity profile of said image along a path through said graduation segments to obtain a set of detected graduation segments and for obtaining a position of said needle relative to said set of detected graduation marks; and an  
20 interface device to communicate with a communication network.

The algorithm according to the method locates the center of the meter scale and then detects the graduation marks of the scale. It detects the leftmost and rightmost travel of the  
25 scale and the needle pointer. From these data, the meter reading is derived by comparing the relative position of the needle within the arrangement of the detected graduation marks. The invention is applicable to utility meter having a graduation scale and at least one needle. The algorithm can  
30 read multiple meters within one image and computes the reading even when the analog meter is viewed from an oblique angle. Due to the parallel shift between the scale and the needle pointer, additional computational effort must be performed. The method employs the Hough Transform to obtain the  
35 center of the scale and the needle. Whereas the Hough Transform usually is used with a continuous area, the method according to the invention applies strong edge points from the

set of individual spaced graduation marks as input signals to the Hough Transform.

Only during the training period, when the method and the apparatus are adopted to a specific meter, it is necessary to perform the Hough Transform for the detection of the graduation marks. When the relative arrangement between the meter and the camera of the sensing apparatus does not change, it is sufficient to extract the intensity profile and detect the position of the needle within the graduation scale. When the algorithm detects that the meter moved, meter and graduation scale detection by employing the Hough Transform has to be performed again. As detection criterion for a move of the meter, a parameter which represents the accuracy of the location of the needle is used. Advantagously, this parameter is the number of contiguous angles where the intensity profile is low in the area between the center point and the graduation marks of the scale. This parameter indicates the width of the needle.

20

The Hough Transform is performed on strong edge points of the rectangular shaped graduation marks. The transform computes candidate segments in the direction orthogonal to the gradient of an edge point and at a predefined distance apart from the edge point. By calculating an extreme value of the distribution of the candidate segments and the centroid of the extreme value, the coordinates of the center of the scale and the needle are obtained.

30 From the intensity profile of the graduation marks each graduation mark can be individualized by locating extreme values ("teeth") and applying a deep-pocket criterion to eliminate any local extreme values which do not originate from a graduation mark.

35

When a meter is viewed from an oblique angle the circular graduation scale appears as an ellipse. A circular intensity

profile may not capture all graduation marks so that more than one intensity profile at different radii is extracted, and the detected intensity teeth are merged to obtain a full graduation scale. The correct scale of graduation marks is  
5 detected when the number of teeth is close to the specified number of graduation marks. Practically, an arrangement of detected teeth is considered as the correct graduation scale whose number of detected teeth is within plus or minus one of the specified number of graduation marks.

10

Further when viewing with an oblique angle, the pivot center of the needle and the center of the scale do not coincide. Then, another Hough Transform calculates the center of the needle since the needle either has the shape of a disc or has  
15 a hole near the needle pivot center. The input area to the Hough Transform can be restricted to the surrounding area of the scale center. The Hough Transform is performed in the conventional manner.

20 The method and the apparatus can be used for condition reporting of analog, utility type meters using a wired or wireless communication network. When the actually captured meter value meets a certain condition, which can be input via the network, a message or condition report is transmitted to a  
25 central control station. There, further activities can be initiated.

The apparatus for performing the method has a fully digital architecture and can be further integrated when circuit technology advances. The imaging subsystem captures the image of  
30 the meter. The embedded processor performs image processing as well as image analysis to derive the meter reading in form of a digital value. The CPU may run web server software so that it reacts to the requests of a client connected  
35 through communication modules within the apparatus, such as ISDN, Modem or GSM modules. If the Short Message Service of a

GSM network is used, then any cellular phone can read any meter independent of the time and place.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5

The accompanying drawings show the principles of the invention and an preferred embodiment. Corresponding elements are denoted by like numerals. The drawings show:

10 Figure 1 a block diagram of a meter reading apparatus;

Figure 2 a flowchart of the operation of the apparatus for orthogonally viewing the meter scale;

15 Figure 3 edge points for a Hough Transform of a contiguous area;

Figure 4A and 4B stand 4C candidate segments for a radial line segment of the graduation scale, edge points  
20 of the graduation scale, and two different sets of candidate segments for the full graduation scale, respectively;

Figure 5A and 5B and 5C different intensity profiles with local maxima and minima;  
25

Figure 6 a relation between a needle pointer and radial line segments as well as corresponding intensity profiles;  
30

Figure 7 a flowchart for the operation of the apparatus for oblique viewing the meter scale; and

Figure 8 a flowchart for the operation of the apparatus with a detection for any moving of the meter.  
35

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to an apparatus consisting of an imaging subsystem and a computer or an embedded processor to process the image from the imaging subsystem. The image  
5 from the imaging subsystem is digitized and stored in the computer for further processing. Without loss of generosity, it is assumed that the image is digitized with a square spacing.

10 Usually the camera views the analog meter in an orthogonal or normal direction. The circular scale will then look like a circle on the image. However, in some situation the camera has to be positioned sidewise so that the meter is viewed obliquely. In this case the circular scale will appear as an  
15 elliptic shape. This invention can deal with both situations.

The method and the apparatus according to the invention serves to read a wide variety of analog meters. Therefore the design of the machine vision algorithm is to detect and lo-  
20 cate features that are common among analog meters. From the image processing perspective, an analog meter consists of a circular graduated scale, a needle pointer, characters and logos on the dial surface and a metal or plastic casing. The graduation scale, the characters and graphic logos are all  
25 located on the scale surface. The needle moves on a plane that is usually higher than the plane of the scale. Therefore if the meter is viewed obliquely, the center of the pointer will not coincide with the center of the graduation scale.

30 There are many designs of the graduation scale. However, almost all analog meters have a basic graduation scale that is represented by short radial line segments (RLS) arranged in a circle. The angular span of the scale can be from 60 degree (e.g., a voltmeter) to 270 degree (e.g., most pressure gau-  
35 ges). All radial line segments intercept at the center of the scale, which is also the center of rotation of the needle if the meter is viewed normally. Some meters have dual graduati-



on marks in reading in different units. The angular spacing between the scale graduation marks is not necessary uniform. Because all meters have this radial line pattern, the present invention detects and locates this radial line segment pattern. By comparing the needle angle with respect to the angles of the detected graduation marks, the present invention can read meters with linear or non-linear graduation scale.

- Many analog meters have longer coarse graduation marks separated at multiples of the finest graduation marks. In the present invention, only the finest graduation marks, or the finest spaced RLS, are detected and used.
- Needle pointers can also take many shapes. In general, a needle is narrow on one side of the needle pivot point. On the other side, the shape can be arbitrary, but usually is wider and shorter. The needle tip may or may not reach into the region of the graduation marks. The needle usually has a circular shape near the needle pivot center.

Characters and graphics on the scale surface show the coarse scale numbers, the company logos and other information. Even though useful to a human reader, these characters and graphic symbols are not detected and used in the present invention. During training of a meter type, the system needs to know what reading the leftmost graduation mark is and how much reading increment for each increment of graduation mark. In some analog meters, the leftmost graduation mark does not necessarily correspond to a zero reading.

The casing of the analog meter is usually round. If the casing is made of stainless steel, its reflective surface made it an unreliable feature for image processing. When the illumination is not diffuse and uniform, the casing can cast a shadow on the surface of the scale. If viewed normally, the

shadow takes the shape of a partial circle and it co-exists with other circle features from the round casing.

The automatic reading device 70 shown in figure 1 comprises  
5 an image sensor 71 which captures an image of a single or several analog meters 81, 82. The sensor may be a CMOS image sensor or a CCD device. The apparatus comprises an embedded processor 72 which preferably runs with a standard operating system. The processors 72 performs the algorithm for image  
10 analysis and meter reading. The processor has an image processing subsystem 73 and a communication subsystem, preferably a web server module 74 as shown in the example. The processor is connected to one or multiple communication modules, e.g. a GSM module 75, an ISDN interface 76, or an analog modem 77.  
15 The communication module provides connectivity to a wired or wireless communication network 83. Via the communication network 83 the device 70 can communicate with a central station which monitors the operation of the device or responds to inputs from the device. Any communication over the wireless  
20 communication network may employ Short Message Service. The device 70 may also receive control inputs from a cellular phone 84. The input may be a reference value for comparison with the meter reading. When the read value exceeds the reference value, a transmission of a message is performed.

25 Figure 2 shows a flow chart depicting an overview of the vision algorithm software performing the automatic reading of an analog meter when the meter is viewed from a normal direction. For an oblique-view image of a meter, more processing  
30 steps are needed which will be described later in connection with figure 7. In the first step 8 of Figure 2, two 3X3 Sobel edge operators are convolved with the image of the analog meter to obtain the horizontal and vertical edge gradient ( $g_x$ ,  $g_y$ ). The magnitude and the direction of the edge gradient are  
35 computed. All pixels with a gradient magnitude greater than a threshold are classified as strong edge points. The threshold for the gradient magnitude should be set so that most of the

edge points of the graduation marks are selected. It can be a fixed parameter or defined during the meter type training stage by computing the average gradient magnitude of the graduation marks in an area selected by the human trainer.

5

Hough transform (HT) in general is used extensively in the past for the detection of lines, circles, ellipses, and other shapes such as corners, and polygon. The book by Davies has an extensive discussion on the techniques. In the prior art, 10 the shape detected by Hough Transform is mostly formed from one single contour, whereas the invention uses the Hough transform for the detection of multiple radial line segments (RLS) arranged on a circle. The RLS as such are separated from each other. To explain the Hough Transform technique for 15 the circular RLS pattern, it is instructive to review the HT for the circle detection first. Referring to Figure 3, the black disk 16 has an irregular boundary 20. After edge gradient operation and thresholding, all strong edge points, such as A, B, or C, lie on the boundary 20. For a black disk, the 20 edge gradient points outward. Thus at strong edge point A, the opposite of its edge gradient 17 points toward the center of the circle. Therefore if the radius of the circle  $R$  is known, a candidate center point that is  $R$  distance away from the edge point A along the negative gradient direction 18 is 25 placed on a so-called parameter plane. The parameter plane refers to the  $x$ - and  $y$ -coordinates of the center of the circle. Each candidate point is a vote at its location on the parameter plane. For another strong edge point B that is also on the edge of the same circle, another candidate center 30 point will be placed close to the previous one. On the other hand, for a strong edge point C that is not on the edge of the same circle but on the irregular boundary 20, its candidate center point will be located at some other place. By accumulating all the candidate center votes from all strong 35 edge points, a cluster 19 will be formed at the center of the circle. The location of the circle can then be determined by peak detection of the cluster. If the radius of the circle is

not known, then the parameter space becomes three-dimensional, or multiple parameter planes. Each parameter plane is used to accumulate candidate center points for each circle of specific radius. If a peak is detected on a parameter plane of a particular radius, then a circle with this specific radius with center at the peak location is found. Since multiple parameter planes consume large memory, therefore in practice a range of potential radius is given and only one single parameter plane is used. In such case instead of placing a candidate center point, many points along a candidate center "line segment", which corresponds to the range of potential radius, is placed on the parameter plane for vote accumulation. Then a peak corresponds to the detection of a circle with a radius within the range given. If needed, further processing can determine the exact radius of the circle. With a slight modification, the Hough Transform can be used to detect a hole whose edge gradient points inward toward the center of the circle.

The Hough Transform according to the invention for the circular RLS pattern is now described. Like the circle Hough Transform, only a single parameter plane will be used for vote accumulation. Referring to Figure 4B, under spatial digitization, each RLS is a narrow rectangle 28. The previous edge extraction step 8 actually extracts two lines of strong edge points such as 29, 30 along two sides of the medial axis 34 of the RLS. The two edge points 29, 30 of a RLS have opposite gradient direction 32, 33 and are slightly off from the medial axis of the RLS. Ideally, the center of the RLS pattern lies on the medial line of the RLS, not the two edges of the RLS. However, it is assumed for now that the edge points are very close to the medial line.

It is assumed that the mean radius  $R_0$  of the circular RLS pattern, or the distance from the center of the pattern to the middle point of the graduation mark, is given. Referring to Figure 4A, for each strong edge point 22 (which can come

from either side of a RLS), a candidate line segments 23 orthogonal to the edge gradient 25 is placed on the parameter plane for vote accumulation. The distance from the strong edge point 22 to the middle of the candidate line segment 23 should equal to the mean radius  $R_0$ . The length of the candidate line segment, which is denoted as  $G$ , is selected as a fixed factor  $\alpha$  multiplied by the length  $L$  of the RLS, which is also given. Usually this factor is greater than 1. Since the center of the pattern can be located on either side of the strong edge point 22, another mirrored candidate line segment (not shown in Figure 4A) on the opposite side of the strong edge point 22 will also be placed on the parameter plane. For another strong edge point 26 on the same RLS, similar candidate line segments 27 of length  $G$ , with an axial shift, will be placed on the parameter plane. The accumulated votes from all edges points on a RLS form a trapezoidal line spread function 24. The base of the trapezoidal line spread function has a width of  $G + L$  and the top plateau region has a width of  $G - L$ . For edge points on another RLS, two candidate line segments with the same line spread function will be placed on the parameter plane with a slightly different angle. As shown in Figure 4C the one of the candidate line segments focusing toward each other will create an overlapping radial pattern 35 around the center of the original circular RLS pattern 21 while the other set 36 will spread widely around a larger circle. This vote distribution function on the parameter plane will have a peak 37 located at the center of the RLS pattern 21. Normally the peak to background ratio is very high for analog meters because most of the non-RLS related edge points contribute candidate points that are spread sparsely on the parameter plane. On the other hand, there are 10 - 15 strong edge points from each of the 50 - 100 graduation marks that contribute candidates line segment concentrating near the center of the RLS pattern.

35

The two processing parameters: the mean radius  $R_0$  of the circular finest graduation marks and the length of the finest

graduation marks  $L$ , depend on the meter type. Both parameters are defined during the training of the meter type. When a meter of multiple graduation scales exist, the selection of mean radius  $R_0$  decides which graduation scale will be used.

5

The use of the edge points in lieu of the median line points for Hough Transform described above can be improved by a simple technique. Referring back to Figure 4B, if the distance  $W$  between the two edge points 29, 30 is known, then an estimated median line point can be obtained by shifting the edge point a distance  $W/2$  along the negative edge gradient direction. Ideally the distance  $W$  is determined by the number of pixels sampled across one graduation mark (or one RLS) which varies from meters to meters and from fine graduation marks to coarse graduation marks. Experiments show the shift of 1 pixel is satisfactory for most meters with appropriate image resolution (320 x 240 to 640 x 480 pixels).

10

15

20

25

30

The next step 10, shown in Figure 2, is to detect and locate the peak from the vote distribution function generated from the Hough Transform described above. If there is only one circular RLS pattern (or one analog meter) in the image, which is usually the case for analog meter reading, then the peak can be determined by finding the maximum of the vote distribution function. If there are multiple meters in the image, then the second peak can be found by searching for a maximum after zeroing out the value of the vote distribution function around the first peak region. The process can be repeated for detecting more meters. The center of the circular RLS pattern can be estimated by computing the centroid of the peak, e.g. using the formula

$$x_c = \sum_{i,j} x_i f(x_i, y_j) / \sum_{i,j} f(x_i, y_j),$$
$$y_c = \sum_{i,j} y_j f(x_i, y_j) / \sum_{i,j} f(x_i, y_j).$$

The summation is over a limited area around the peak of the vote accumulation function  $f$ . Because the peak to background ratio is high usually, the centroid estimate is not very sensitive to the size of the summation area as long as the entire peak is included within the summation computation.

The detection and localization of the RLS pattern by the Hough Transform according to the invention do not require that the radial line segments occupy a complete circle or are uniformly distributed in angle. Graduated scales of most pressure gauges have a 270 - degree span while scales of most electronic analog multi-meters have less than 90 - degree span. However, the estimated centroid location of the RLS pattern is slightly sensitive to the correctness of the mean radius given, especially if the angular span of the RLS pattern is less than 180 degrees. This is because if the mean radius given is either shorter or longer, the line spread function 24 (Figure 4A) coming from an RLS will not be centered at the center of the RLS pattern. Thus if there is no similar line spread function contribution from an RLS 180 degree apart, the accumulated votes will not be symmetrical around the center. When contiguous candidate line segments are missing from one side, then the computed centroid will be shifted away from the true center of the pattern.

25

The center of the RLS pattern corresponds to the center of the meter's scale. The next step 11 (Figure 2) is to extract the intensity profile of the image cutting through the finest-spaced graduation marks. A circular path centered at the estimated center of the RLS pattern and with the mean radius  $R_0$  is used to extract the intensity profile. The next step 12 is to detect and locate the individual graduation marks. A graduation mark appears as a deep-pocket minimum, called a "tooth", on the intensity plot. For repeated black graduation mark pattern, the teeth form a comb-like pattern on the intensity profile. Since there are characters or graphics on the scale surface, the intensity profile may contain other

teeth that have a spatial frequency quite close to that of the graduation marks. In other words, the intensity profile can contain sections of comb-like teeth structure from characters and graphics quite similar to those from the graduation marks. The algorithm needs to distinguish combs corresponding to the graduation marks from combs that are not graduation marks.

A detailed explanation of the step 12 follows. First all the teeth are located. Then the spacing between teeth are checked so that only contiguous teeth with spacing less than a threshold are grouped into combs. Finally the one comb with the number of teeth that is close to a specified number of graduation marks is considered as the correct graduation scale. From this detected graduation scale, the angular positions of the beginning of the scale and the end of the scale are determined. Referring to Figure 5A, a tooth is defined as a local minimum in intensity 38 whose intensity's increase to the nearby local maxima 39, 40 is greater than a pre-defined threshold, as shown in the figure with the data points circled. This deep-pocket criterion for both sides of the local minimum can eliminate an intensity edge as shown in Figure 5B. However, it also ignores some legitimate teeth as shown in Figure 5C that occurs because of the noise in the image intensity (left diagram) or a thick graduation mark (right diagram). Therefore the software will detect these teeth by finding two neighboring one-sided steep minima 41, 42 that are separated by a distance less than a threshold. In this case, the location of the teeth is defined as the midpoint between the two local minima. Once all the teeth are detected, the algorithm then checks for the spacing between neighboring teeth. All teeth with neighboring spacing less than a threshold are grouped into one comb. This spacing threshold can be computed as the median value of all the spacing between neighboring teeth. In other words, there are 50% of the neighboring teeth's spacing below this threshold and 50% above. The median of the teeth's spacing, instead of



the average of the teeth's spacing, is a reliable method to estimate the spacing between the graduation marks because more than 50% of the teeth detected are graduation marks. Since the intensity profile is an angular function, the beginning and the end of the profile array actually are neighbors. Thus the algorithm needs to check if a comb at the end of the intensity profile actually connects to a comb at the beginning. After all the combs are detected, the algorithm finds one comb whose number of detected teeth is within plus or minus one of the designed number of graduation marks. This comb corresponds to the graduation scale. The reason for plus or minus one is to account for the tip of the needle pointer. As shown in Figure 6, when the tip of the needle is included in the intensity profile, its position can either overlap, separate slightly or separate completely from the graduation marks as shown in the left, middle and right diagrams. The corresponding intensity profiles of these three situations are shown at the bottom. For the right diagram case, the total number of detected marks is one extra. For the middle case, the needle and the touching graduation mark may both be missed because of the intensity fluctuation. Therefore the detected number is one less. For the left diagram case, the detected number of graduation marks is the same as the designed number.

When none of the comb has a teeth number that matches the designed number of graduation marks, then it is possible that some graduation mark has so low a contrast that it is not detected. In this case, the graduation scale is divided into two or three combs. Therefore the algorithm checks for two or three neighboring combs to see if the total number of teeth come close to the designed number of graduation marks. If yes, then the algorithm can interpolate the missing graduation marks. If no, an error message is given.

Next step 13 is the detection and localization of the needle pointer. When the meter is viewed normally, the scale center

coincides with the needle pivot point. Since the needle can rotate to any angular position within the range of the scale, the black needle can overlap with the high-contrast black graphic background at many possible needle angles. Therefore  
5 two sides of the needle may not appear as straight lines. To avoid the problem due to complex background, patent 5,673,331 uses the template matching technique to match the shape of the needle at various angles to the image. The angle with the best match score determines the angle of the needle. The  
10 technique requires that the shape of the needle be trained first. The present invention, however, uses a simple and fast method that also overcomes the problem of cluttered background. This technique is based on the observation that at angles where the needle is located, the radial intensity profile from an inner radius  $R_1 = a * R_0$  to an outer radius  
15  $R_2 = b * R_0$  shows "contiguously" low value. There the algorithm searches for those angles whose intensity values of the radial intensity profile are below a preset threshold "contiguously" between radii  $R_1$  and  $R_2$ . Typical values for a  
20 and b are 0.4 and 0.85 respectively. Both parameters can be meter-dependent. Since a needle has some finite width, several contiguous angles satisfy this requirement. Then an average can be taken as the needle angle if all angles are contiguous. If there are more than one group of contiguous  
25 angles, then it is an indication of multiple detected needles. For analog meter with only one needle, multiple detected needles will signal an error.

Once the angle of the needle is extracted, the next step 14  
30 is to project its angular position onto the graduation marks detected earlier. If the number of graduation marks is one more than the designed number, it can be verified now that the extra tooth indeed comes from the needle. If not, it is possible that the pointer does not appear as a separate teeth  
35 and some spurious intensity noise has generated the extra teeth. By examining the spacing between the teeth, this spurious tooth can be removed.

The last step 15 is to convert the needle angle to meter reading. There are two methods. The first is to find the two graduation marks where the pointer lies between. From the relative angular position of the pointer and the two neighboring marks, a sub-graduation reading can be made by interpolating between the angles of the two graduation marks. The second method is to fit all the detected graduation marks with a continuous linear function or nonlinear function so that a mapping between the angle to the reading can be made. Knowing the angle from the first scale mark to the needle, the reading can be obtained from the fitted mapping function. As mentioned in the beginning, the first graduation mark may not necessarily represent a zero reading.

The processing flow as shown in Figure 2 can determine the arbitrary position and orientation of the analog meter. This is especially useful during the training phase, or during the field installation testing after installing the automatic reader to the field meters. Afterward, if the imaging conditions remain the same, then the position of the scale center, the angular position of the first graduation mark, the average spacing between graduation marks and the mapping between angle to reading will not change. Therefore for a new reading, only the needle angle needs to be detected and located. In other words, only the last three processing steps 13, 14, 15 in Figure 2 are needed once the relative positions between the meter and the meter reader is fixed.

Referring to Figure 8, the switching between the full processing of meter reading (8 - 12 in Figure 2 and step 93 in Figure 8) and needle localization processing (13 - 15 in Figure 2 and step 93 in Figure 8) can be done automatically by using one parameter readily available in the needle localization processing. In the processing step 13, There are several contiguous angles where the intensity is contiguously below the threshold intensity along the radial direction from  $R_1$  to  $R_2$ .

When there is one needle detected, the number of these contiguous angles (denoted as  $N$ ) is proportional to the width of the needle and should remain roughly the same when the needle is rotated to different angle. However, if the relative imaging conditions changes (such as the when the analog meter is moved), then the needle localization processing can detect no needle, or multiple "false" needles, or possibly one "false" needle. Therefore, when one needle is detected, the algorithm checks if  $N$  changes substantially from the previous needle localization processing in step 94. If yes, it is an indication of the change of imaging conditions and the algorithm switches to the full processing. This process is shown in Figure 8 when the algorithm performs the meter reading continuously in a loop 93, 94, 95, and 96. Since the meter and graduation scale detection/localization normally take longer to compute, the partial processing of needle localization can increase the response time of the system substantially. Thus, the processing time which is in the range of several seconds for the full algorithm including Hough Transform can be reduced to a fraction of a second for the needle detection and localization only.

The algorithm described above can be extended for situations when the camera views the analog meter from an oblique angle. There are several changes to the image. First, the circular graduation scale becomes an elliptical graduation scale. However the radial line segments of the graduation marks still intercepts at the center of the graduation scale. Therefore the Hough Transform according to the invention still works for the elliptical radial line segment pattern. If the oblique viewing angle is  $\Phi$ , then along the major axis of the elliptical graduation scale, the mean major radius is still  $R_0$  and the mean minor radius is reduced to  $R_0 * \cos\Phi$  along the minor axis. The length of the radial line segment is also reduced by a  $\cos\Phi$  factor from the major axis direction to the minor axis direction. The spacing between two contiguous graduation marks however is reverse, going from a distance of

$\Delta g$  to  $\Delta g * \cos\Phi$  from the minor axis to the major axis. In other words, the ratio of the angle of two contiguous graduation marks along the major axis to that along the minor axis is  $\cos^2\Phi$ . The second change in the oblique meter image is

5 that the center of the pointer no longer coincides with the center of the graduation scale. This is because the pointer rotates on a plane that is higher than the plane of the scale. Therefore the technique to perform the reading from an oblique image will be different. The third possible change is

10 that the round casing of the analog meter may obstruct some graduation marks. The present invention can still perform the reading of an analog meter even when part of the radial line segment is missing for some graduation marks. If the obstruction is so large that the complete radial line segment is

15 missing for some graduation marks, then the system will raise an error message.

Figure 7 depicts an overview of the processing flow when the meter is viewed obliquely. The first step 52 is the same as

20 that in Figure 2. The second step 53 uses the Hough Transform algorithm according to the invention to detect and locate the elliptical RLS pattern. It is similar to that for the circular RLS pattern except that the two operating parameters  $R_0$  and  $L$  need to be selected differently. From the center of the

25 graduation scale, the strong edge points of the graduation marks can now have a shortest distance of  $R_0 * \cos\Phi - L * \cos\Phi/2$  up to a longest distance of  $R_0 + L/2$ . Therefore instead of specifying  $R_0$  and  $L$  to the Hough Transform algorithm, the user selects the shortest distance  $R_1$  and the lon-

30 gest distance  $R_2$  of the edge points of the graduation marks during the training. The system computes the  $R_0$  and  $L$  by using the formula:  $R_0 = (R_1 + R_2)/2$  and  $L = R_2 - R_1$ . The length of the candidate line segment  $G$  on the parameter plane is then equal to  $\alpha * L$ , where  $\alpha$  can be a fixed number different

35 from that for the circular RLS pattern.

The following step 54 is also the same as that in Figure 2. The peak from the vote accumulation of the Hough Transform still stands out clearly on the parameter plane. The next two steps 55, 56 are the same as those in the case of circular

5 RLS. There are two situations. When the viewing angle is small or the graduation marks are long, the intensity profile can capture all the graduation marks and the graduation scale can be detected correctly. Then the algorithm can proceed to step 58 after the decision box 57. However, if the viewing

10 angle is large, the intensity profile along one single circle may not capture all the graduation marks that are now on an ellipse. In this case only certain sections of the graduation marks will be detected on one single intensity profile. Multiple circular intensity profiles at different radii are needed.

15 This is done in step 62 by repeating the extraction of intensity profiles and the detection of the graduation marks from all circles with radii ranging from  $R_1$  to  $R_2$ . The teeth extracted from one intensity profile can correspond to some points on the graduation marks of the meter scale, but not

20 all. Furthermore multiple teeth extracted from intensity profiles of different radii can belong to the same graduation mark. Thus step 63 is used to merge all the angular coordinates of all the teeth together, then order them according to the angular value, and then group teeth with nearly the same

25 angular positions together. Each grouping of the teeth can correspond to one graduation mark, or a corresponding angle of a radial line segment. The angular position of the graduation mark can then be computed as the average or the median of all the teeth in one grouping. At this point, there is one

30 comb whose number of teeth is within plus or minus one of the design number of graduation marks. Then this is the detected graduation scale with each graduation mark located at an angular position that is the average of all angles belonging to the same radial line segment as mentioned earlier.

35

After the graduation scale is detected and located in 57 or 63, the next step 58 is to detect and locate the center of

the needle. As mentioned earlier, the center of the needle does not coincide with the center of graduation scale obtained in 54. To determine the center of the needle, the traditional Hough Transform for circle detection is used since  
5 the needle has the shape of either a black disk or a white hole near the needle pivot center. Due to the fact that the center of the needle is not far from the center of the graduation scale, the Hough Transform can be speeded up by using only strong edge points within a region near the graduation  
10 scale center. Once the center of the needle is obtained, the needle angle can be determined using the same technique 13 of Figure 2. However this needle angle is with respect to the needle center, not the center of the graduation scale where the reading can be made. Therefore, a vector originating from  
15 the center of the graduation scale and parallel to the needle angle can be drawn. This vector corresponds to the projection of the needle pointer from the needle rotational plane to the plane of the graduation scale. Once the pointer is on the scale plane, the angular position of the pointer from the  
20 first graduation mark can be determined and the reading can be obtained using the same algorithm as described in step 15 of Figure 2.

**THIS PAGE BLANK (USPTO)**



## Claims

1. Method for monitoring an analog meter having a set of graduation segments and at least one needle, the method comprising the steps of:

- recording a digitized image of the meter,
- extracting a set of edge points (29, 30) representative of the graduation segments from said image (8),
- performing a Hough Transform on said set of edge points to obtain a center point of said set of graduation segments (9, 10), and
- extracting an intensity profile of said image along a path through said graduation segments to obtain a set of detected graduation segments (11, 12) and to obtain a position of said needle relative to said set of detected graduation segments (13, 14, 15).

2. Method according to claim 1, characterized by obtaining a parameter representative of the accuracy of the position of said needle (91, 95) and performing the steps of recording a digitized image of the meter and obtaining the position of said needle (93, 95, 96) without a step of performing a Hough Transform to obtain the position of the center point as long as said parameter meets a predefined condition (94) and performing said Hough Transform to obtain said center point (92) when said parameter does not meet said predefined condition.

3. Method according to claim 2, characterized in that a number of discret contiguous angles is obtained for said parameter where the intensity profile is below a threshold intensity (94).

4. Method according to one of claims 1 to 3, characterized in that

said step of performing a Hough Transform comprises: for a subset of graduation segments obtaining a corresponding candidate segment (23, 27, 35) orthogonal to an edge gradient (32, 33) of an edge point (29, 30) of each graduation segment (28) of said subset whereby the candidate segment (23, 27, 35) is located at a predefined distance from the edge point of said each graduation segment, and obtaining an extreme value of the distribution of the candidate segments (37) of said subset and obtaining a centroid of said extreme value.

5  
10  
15  
20  
25  
30  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2

further set of edge points thereby obtaining a pivot center of the needle, and projecting the detected position of the needle to the plane of the graduation scale.

- 5 9. Method according to any of claims 1 to 8,  
c h a r a c t e r i z e d b y  
comparing the position of the needle relative to said de-  
tected graduation segments to obtain a digital value for the  
display status of the meter and comparing said digital value  
10 to a preset value and transmitting a message to a control  
station via a communication network (83).
10. Apparatus for performing the method for monitoring of an  
analog meter according to any of claims 1 to 9 comprising:  
15 - a sensor (71) for obtaining a digitized image,  
- a processor (72) for extracting a set of edge points repre-  
sentative of graduation segments of said meter from said  
image, for performing a Hough Transform on said set of edge  
points to obtain a center point, for extracting an inten-  
20 sity profile of said image along a path through said  
graduation segments to obtain a set of detected graduation  
segments and for obtaining a position of said needle rela-  
tive to said set of detected graduation marks, and  
- an interface device (75, 76, 77) to communicate with a com-  
25 munication network (83).

**THIS PAGE BLANK (USPTO)**

## Abstract

## Method and Apparatus for Monitoring an Analog Meter

- 5 A method and an apparatus for remote monitoring of analog meters employ a Hough Transform on the edge points of the meter scale to obtain the centre of the scale (8, 9, 10). The graduation marks and the needle are detected from the intensity profile along various radii (11, 12, 13). Thereby the
- 10 meter reading can be flexibly adopted to different meter scales during an easy training process. The method can be modified for oblique reading of the scale.

## Figure 2

15

**THIS PAGE BLANK (USPTO)**

116

EPO - Munich  
29  
6. Feb. 2000

FIG. 1



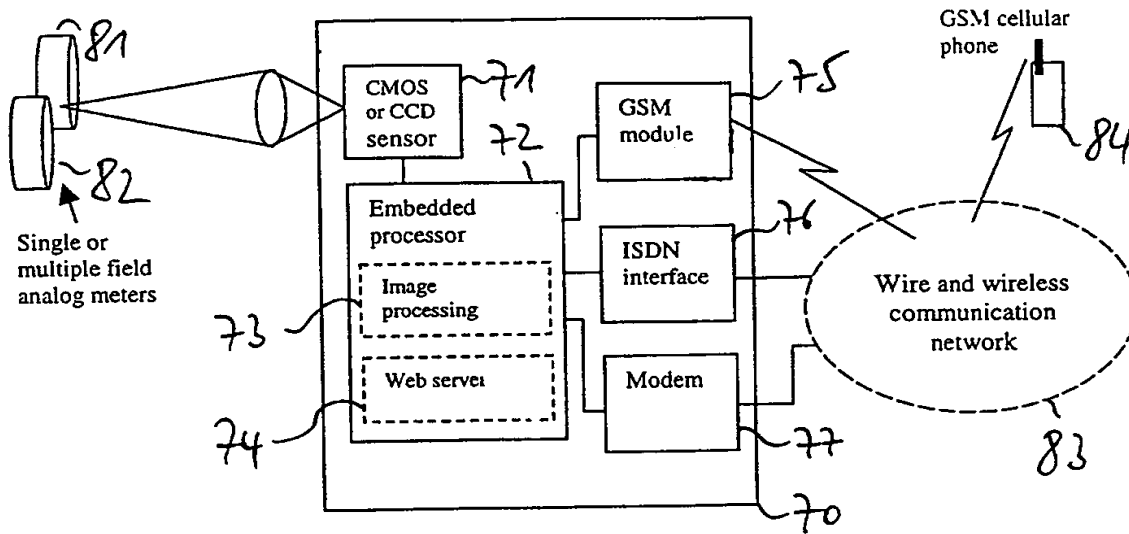


Fig. 3

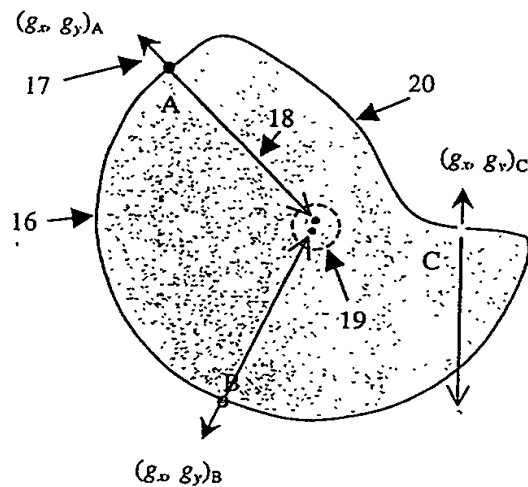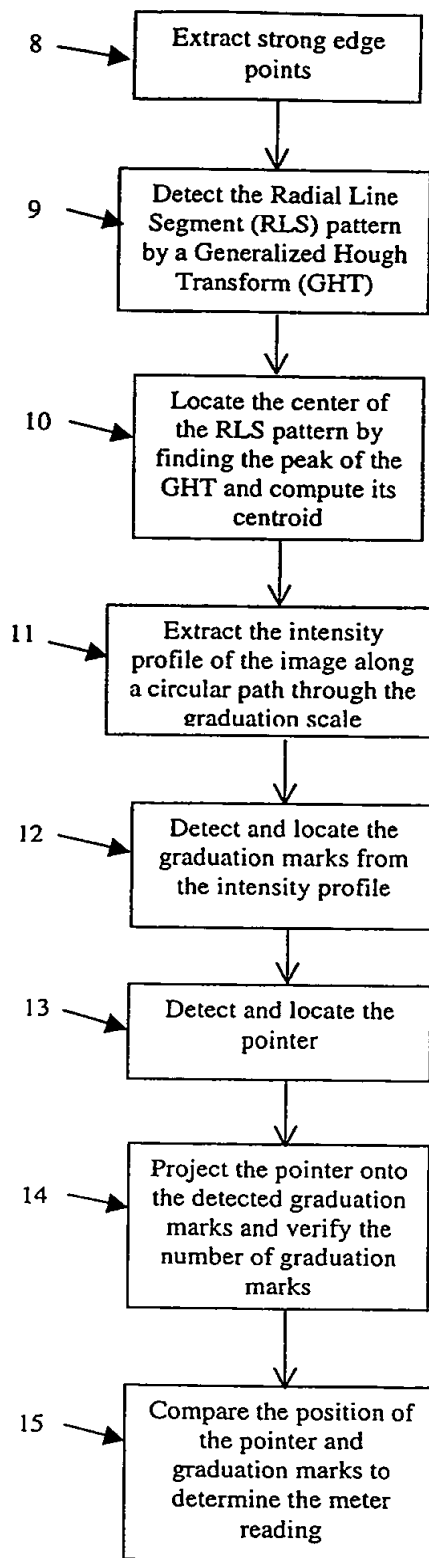

216

Fig. 2





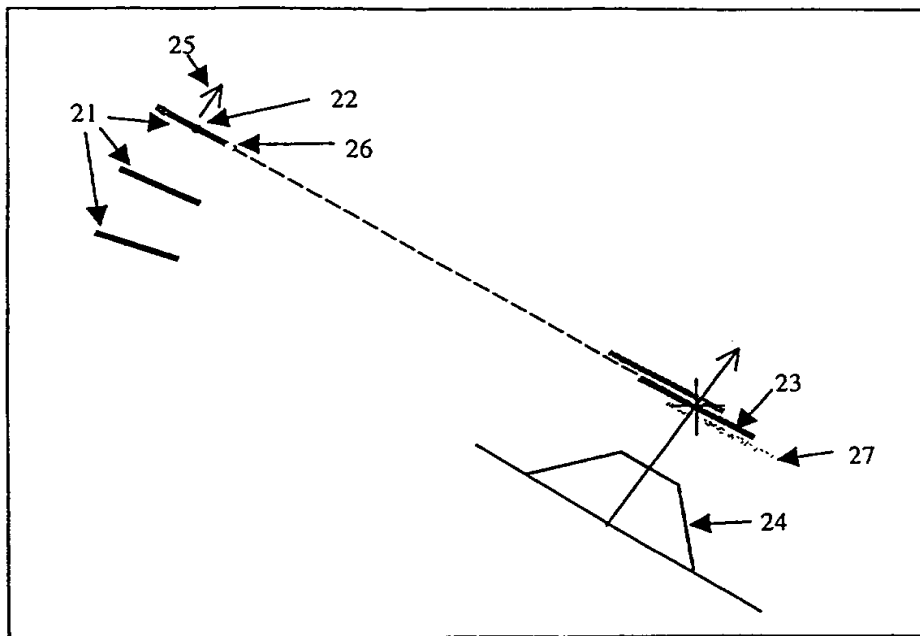


FIG. 4A

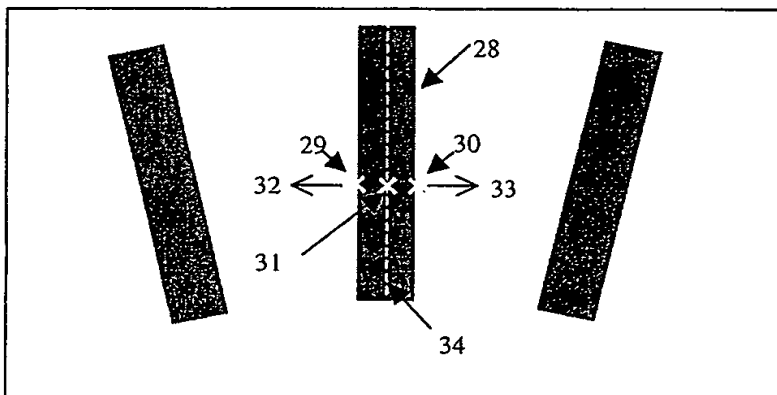


FIG. 4B

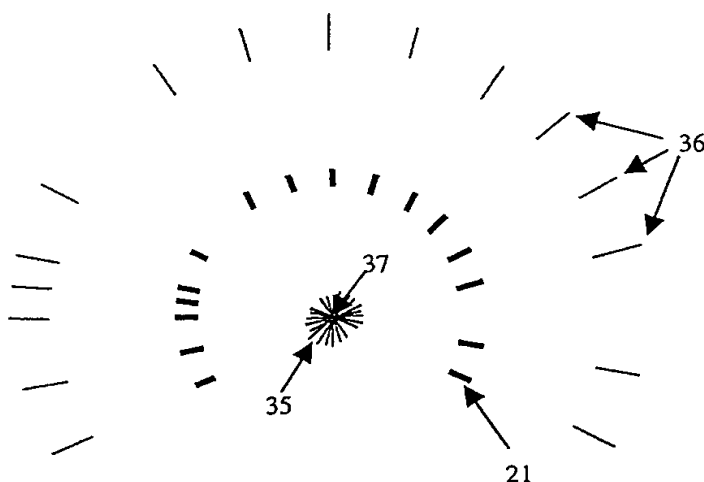


FIG. 4C

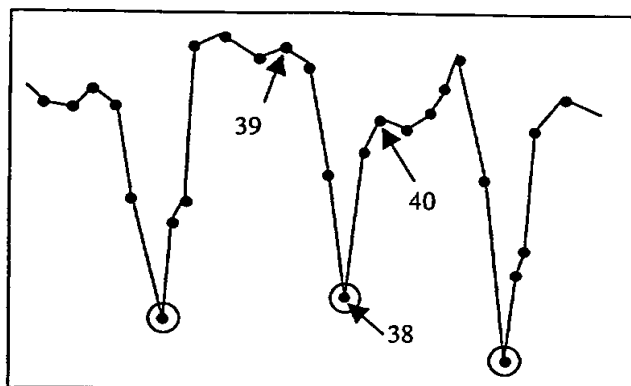


FIG. 5A

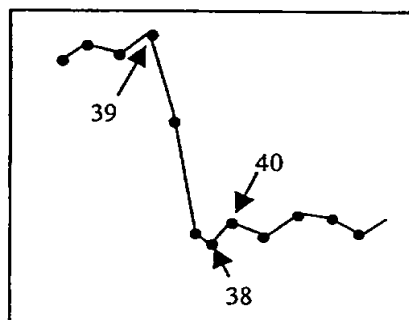


FIG. 5B

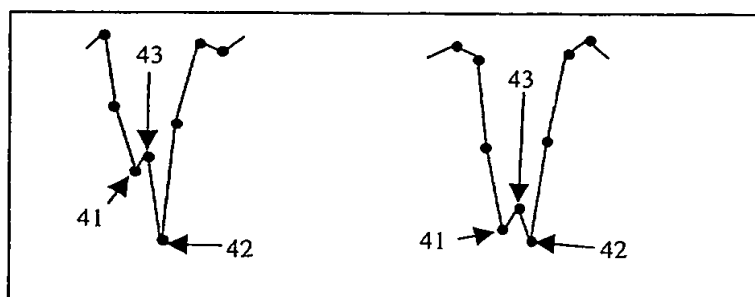
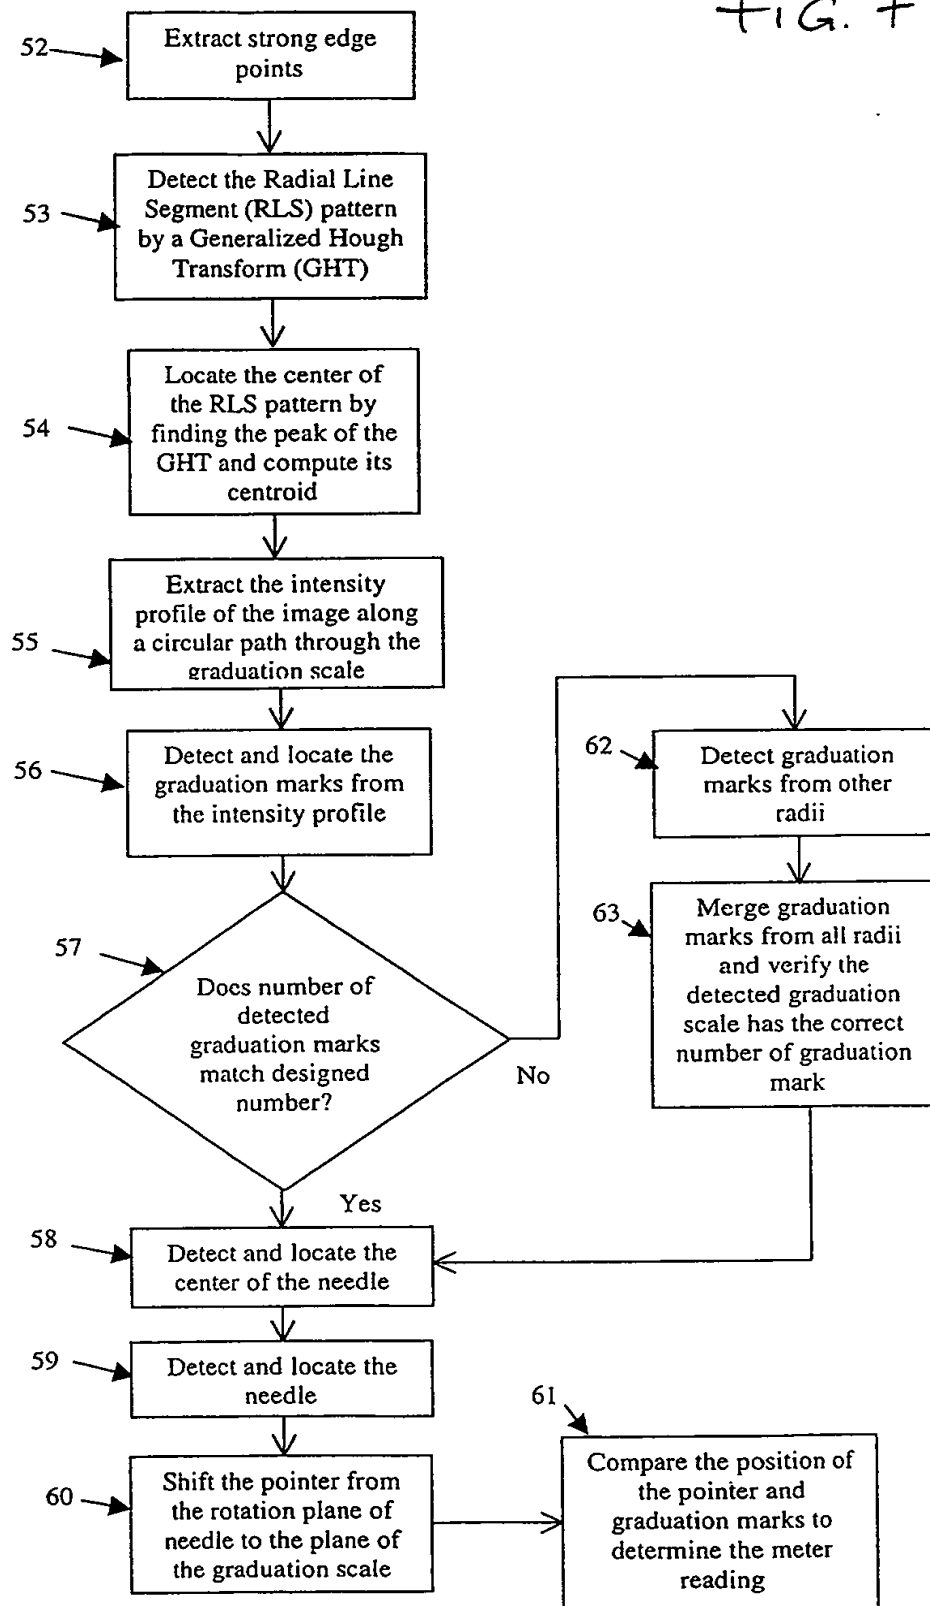


FIG. 5C

516

FIG. 7



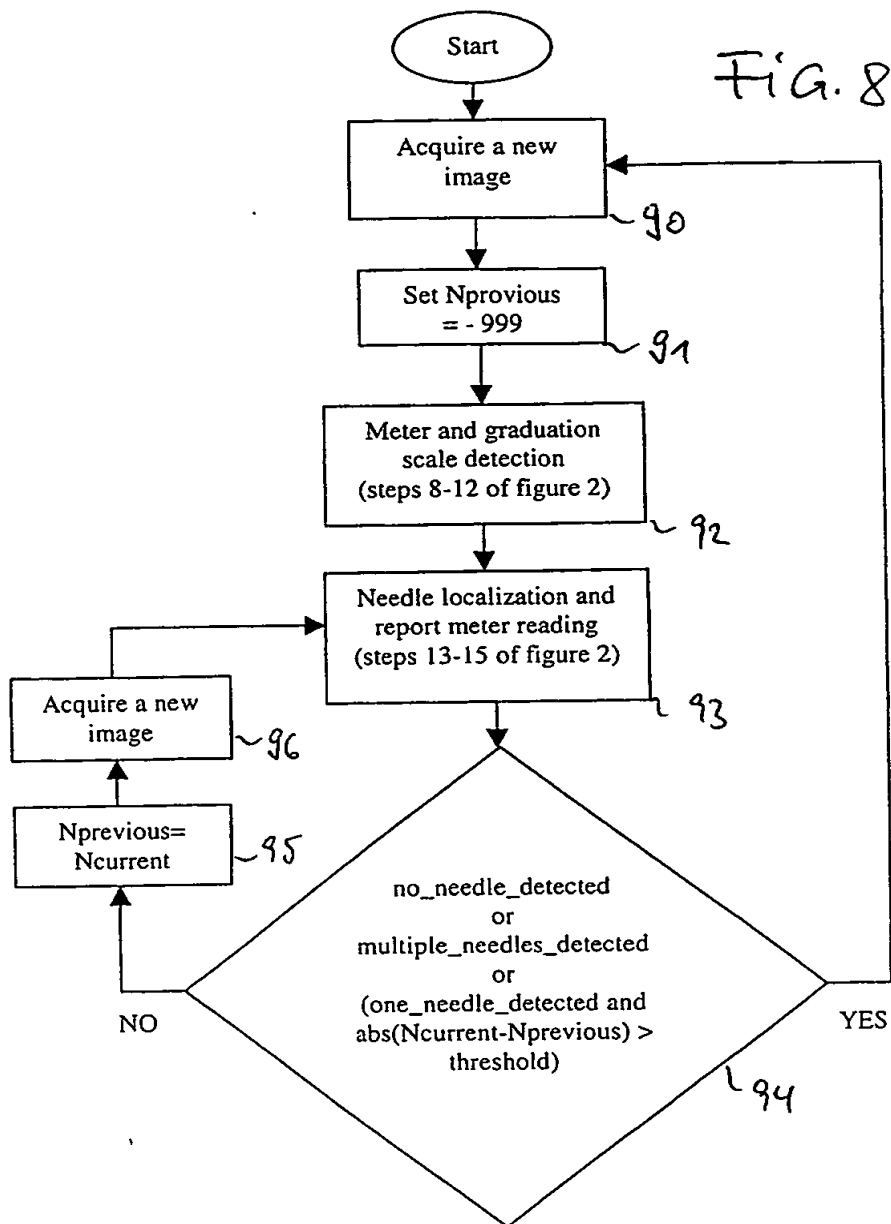


FIG. 6

